

Elixo 800/1300/2000 230 V RTS


Motorization for sliding gates **UP TO 20 M 2,000 KG**



Collective housing Intensive use

Standard installation

1. Elixo 800/1300/2000 230 V RTS
2. Amber light
3. Outdoor antenna

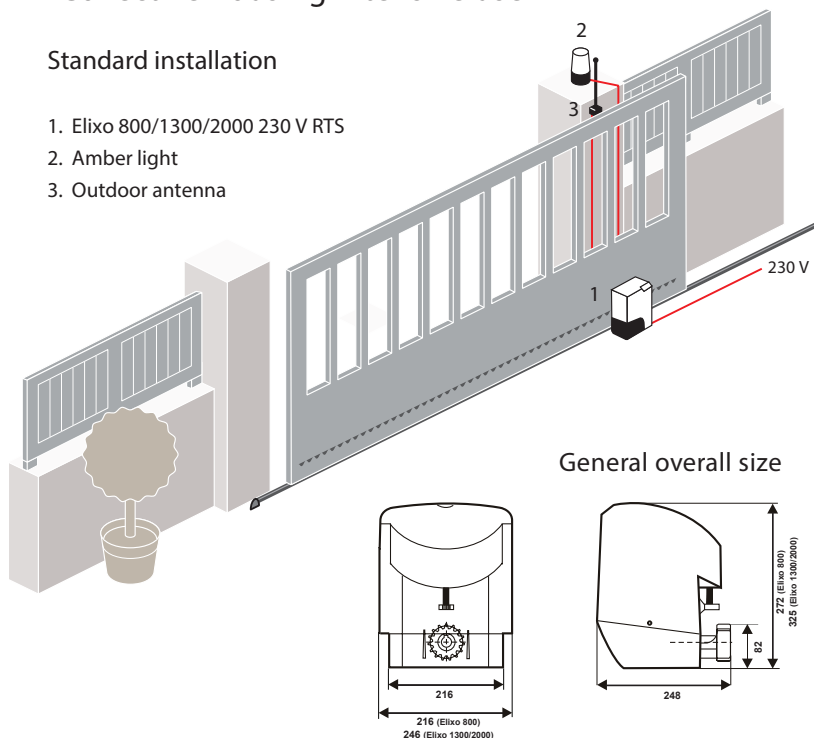

General overall size

Technical characteristics

	Elixo 800	Elixo 1300	Elixo 2000
Mains power supply	230 V (-15% / +10%) - 50/60 Hz		
Motor voltage	230 V ac		
Power consumption	240 W	260 W	270 W
Speed	10 m/min		
Obstacle detection	Electronic detection - adjustable impact force		
Course management	Embedded position encoder		
Gear	1/28 reduction ratio		
RTS radio frequency	433.42 MHz		
Number of remote controls	36 channels maximum		
Index of protection	IP 44		
Operating temperature	-20°C to +60°C		

Accessories

	Elixo 800 230 V RTS motor	Elixo 1300 230 V RTS motor	Elixo 2000 230 V RTS motor	Keygo RTS	Packs per pallet
				Ref. 1841064	
Elixo 800 RTS Ref. 1216329	•	-	-	• 2x	45
Elixo 1300 RTS Ref. 1216264	-	•	-	• 2x	45
Elixo 2000 RTS Ref. 1216330	-	-	•	• 2x	45

Special accessories



Radio keypad metal RTS
More information on page 148

Ref. 1841111 (France)
Ref. 1841116 (International)



Amber light Master Pro 230 V
More information on page 154

Ref. 9015882



1 meter steel rack
More information on page 77

Ref. 9011069



Rubber h 90
More information on page 76

Ref. 9019613